




P.O. Box 3365 South El Monte, CA 91733 626.444.0541 Fax 626.444.3887 www.Afcon.org

**070**

**ATTACHMENT FITTING  
THREADED**

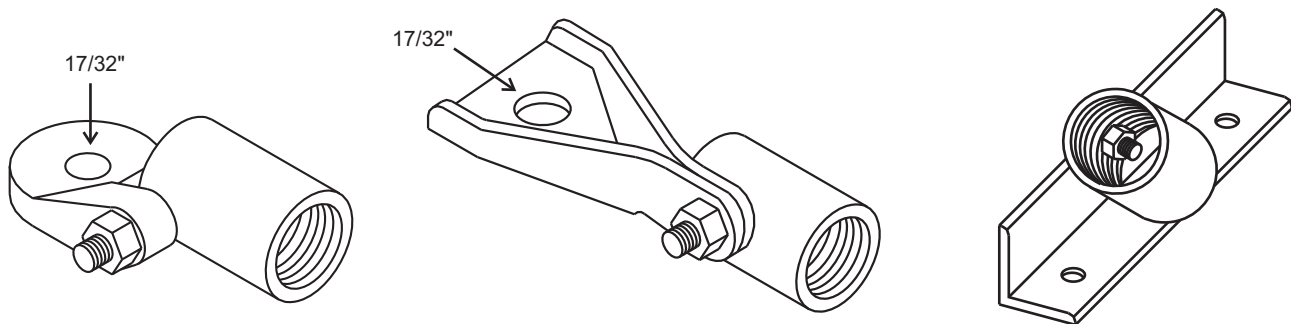


**SIZE** - 1" thru 2" brace pipe Sch. 40.

Use in combination with 1" thru 12" *AFCON* sway brace assemblies.

**MATERIAL** - Carbon steel and ductile iron

**FINISH** - Plain or E.G.

**LISTING/APPROVAL** -

 **203A-EX 2625**  
**OSHPD OPA-0601-07** See Website.

**FUNCTION** - Structural attachment fitting of an *AFCON* sway brace assembly.

Sway brace assemblies are intended to be installed in accordance with NFPA 13 and the manufacturer's installation instructions.

**INSTALLATION** - **Per these instructions** including NFPA 13 and 13R.

**Load rating** - see chart.

The required type number and size of fasteners used for the structure attachment fitting shall be in accordance with NFPA 13.

**ASSEMBLY**

Combine with proper *AFCON* components.

Thread brace pipe into fitting.

Torque pivot bolt to 40 ft. lbs.

**FEATURES**

- \* Swivel allows attachment at any angle.
- \* Larger fastener hole available.- Consult factory.

**ORDERING** - Part #, pipe size and finish.

Horizontal Load Ratings		
Base Material	UL	
Ductile	2765	
Steel	2015	

Specific *AFCON* products are exclusively designed to be compatible **ONLY** with other *AFCON* products including parts and fasteners, resulting in a listed sway brace, restrainer or hanger assembly. **Be advised** the following warranty restriction will apply. **DISCLAIMER** - *AFCON* will **NOT** warrant against the failure of its products when used in combination with other products, parts or systems not manufactured or sold by *AFCON*. *AFCON* shall **NOT** be liable under any circumstances whatsoever for any direct or indirect, incidental or consequential damages of any kind, including but not limited to loss of business or profit, when non-*AFCON* products have been, or are used.

