



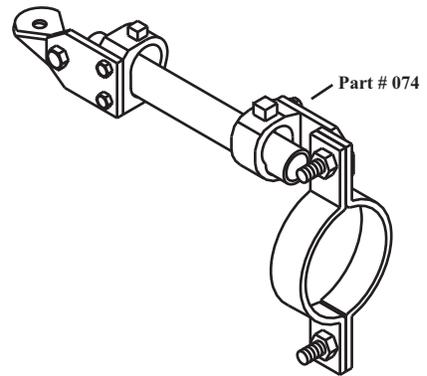

P.O. Box 3365 South El Monte, CA 91733 626.444.0541 Fax 626.444.3887 www.Afcon.org

074

ATTACHMENT FITTING LOCKING



SIZE - BRACE PIPE: 1" thru 2" Sch. 40
MATERIAL - Carbon Steel with Ductile Iron
FINISH - Plain or E.G.
LISTING/APPROVAL -



203A-EX 2625



FM Approved - 1950

FUNCTION - Structure attachment fitting of an AFCON sway brace assembly.

Common transition component with 411 sway brace fitting - see drawing

Sway brace assemblies are intended to be installed in accordance with NFPA 13 and the manufacturer's installation instructions.

INSTALLATION - Per these instructions

including NFPA 13 or FM 2-8.

The required type, number and size of fasteners used for the structure attachment fitting shall be in accordance with NFPA 13.

Load rating - see chart.

DO NOT BEND - If angle required use part 070, 075, 076 or 077.

ASSEMBLY

Combine with proper *AFCON* components- **see disclaimer below.**

Insert brace pipe thru fitting near pivot bolt.

Tighten set bolt until head contacts bracket.

FEATURES

* Visual inspection, verifies proper installation.

* Bolt hole fits 411 sway brace fitting.

ORDERING - Part #, size - brace pipe and finish.

	Max. Horizontal Load	
	30° thru 90°	2015

	Max. ASD Horizontal Load			
	30°-44°	45°-59°	60°-74°	75°-90°
	1410	2000	2450	2740



Specific *AFCON* products are exclusively designed to be compatible **ONLY** with other *AFCON* products including parts and fasteners, resulting in a listed sway brace, restrainer or hanger assembly. **Be advised** the following warranty restriction will apply. **DISCLAIMER -** *AFCON* will **NOT** warrant against the failure of its products when used in combination with other products, parts or systems not manufactured or sold by *AFCON*. *AFCON* shall **NOT** be liable under any circumstances whatsoever for any direct or indirect, incidental or consequential damages of any kind, including but not limited to loss of business or profit, when non-*AFCON* products have been, or are used.

